

Ejector pins similar to DIN 1530, Type AH with one-sided anti-twist lock

- More economical to buy than to manufacturer yourself
- Easy intake manufacturing
- Also suitable as standard ejector
- Standard dimensions available from stock




PRACTICAL – ECONOMICAL – ACCURATE



Eberhard
WERKZEUGTECHNOLOGIE / TOOL TECHNOLOGY

Ejector pins similar to DIN 1530, Type AH with one-sided anti-twist lock

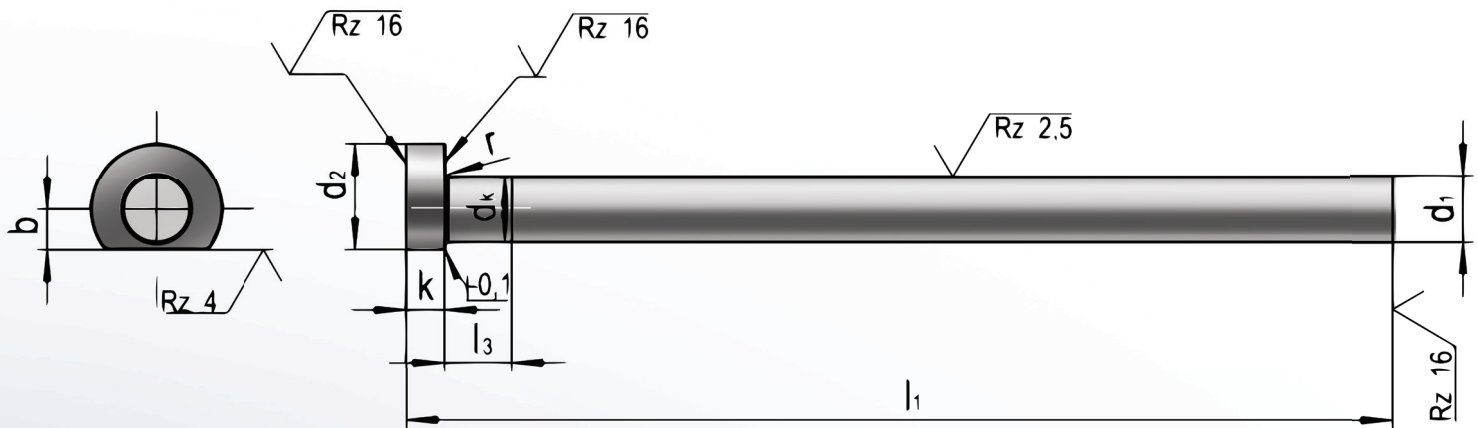

Ø Shaft d1 g6	Ø Head d2 0 - 0,2	Height of head k 0 - 0,05	b 0 - 0,015	l1 + 2 0				
				125	160	200	250	315
2,0	4	2	1,5		•		•	
2,5	5	2	1,75		•		•	
3,0	6	3	2,0		•		•	
3,5	7	3	2,25		•		•	
4,0	8	3	2,5		•		•	
4,5	8	3	2,75		•		•	
5,0	10	3	3,5		•		•	
5,5	10	3	3,75		•		•	
6,0	12	5	4,0		•		•	
8,0	14	5	5,0		•		•	
10,0	16	5	6,0		•		•	
12,0	18	7	7,0		•		•	

You can find any missing information in our main catalogue. Ejector pin with cylindrical head DIN 1530 part 1, Type AH, hardened (similar to DIN ISO 6751)

Version: Head: warm compressed - Shaft: highly tempered and hardened, fine-polished

Material: WS: Tool steel

Hardness: Shaft: HRC 60 + 4 / -2 Head: HRC 45 +10 / -5



Eberhard
WERKZEUGTECHNOLOGIE / TOOL TECHNOLOGY

